





Specialty Products

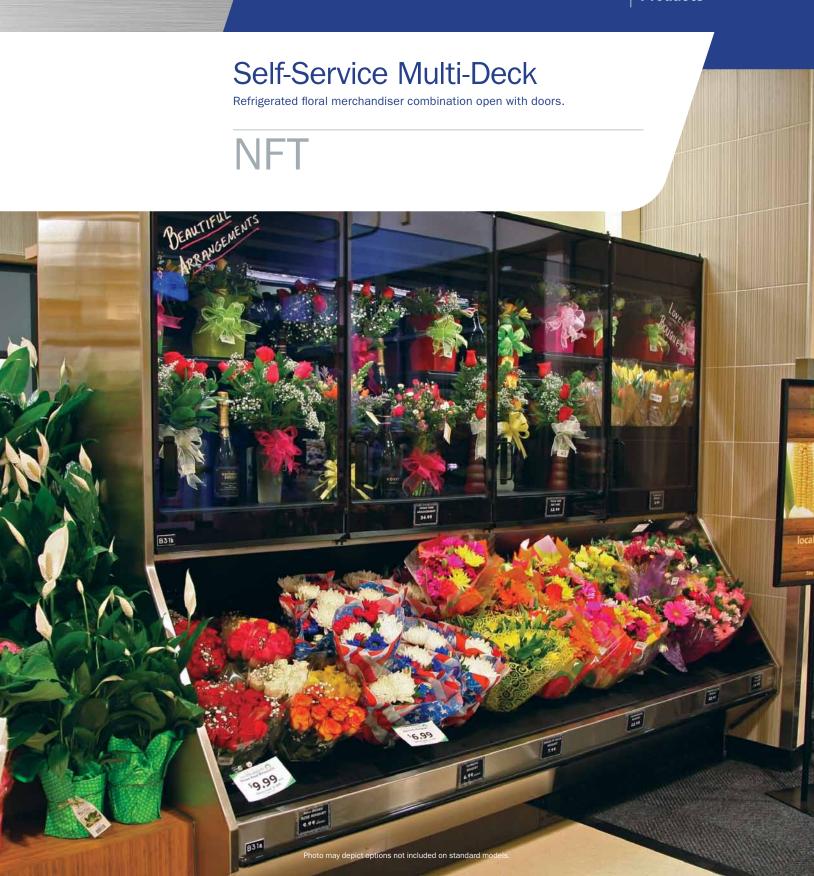

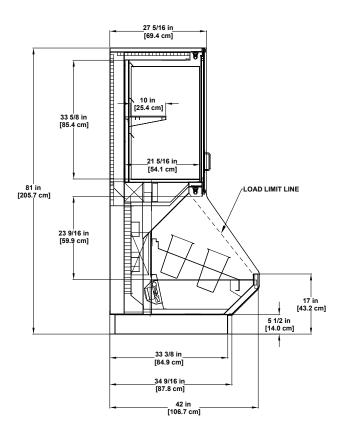

Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice. Designed for optimal performance in store environments where temperature and humidity do not exceed 75°F and 55% R.H. Certified to UL 471, NSF Standard 7 and CAN/CSA C22.2.

## **Available Options**

- Solid painted, mirrored polished stainless steel or glass ends.
- Exterior standard grade laminate.
- · Interior or exterior stainless steel.
- · Cart bumper.
- Additional glass shelves or vases.
- · LED lighting.
- Remote glycol, CO<sub>2</sub> refrigeration package
- MPSS inside back.

## **Features and Benefits**

- · Sled-runner base construction.
- Standard 81"H and 42"D.
- Standard 5-1/2"H toekick.
- Painted black exterior, exterior trim, base trim and case top.
- 1 adjustable 10" glass shelf in upper section.
- Outside back: unfinished galvanize and rear toekick.
- Standard painted black interior and inside back.
- 2 rows of recessed black vases on angled deck in lower section.
- Black Eagle 11"T, 7" diameter display vases.
- 120-1-60 electrical.
- T8 lighting.
- Top light in lower section.
- 24" regular glare, frameless glass doors on upper section.
- Remote DX refrigeration package.







Keosauqua, IA 319.293.3777 hillphoenix.com

©2014 Hillphoenix, Inc.